



SMTDR SERIES

UNSHIELDED SMT POWER INDUCTORS

Applications :





- Power supply for VTRs. LCD televisions.
- Notebook PCs, Portable communication equipment
- DC/DC converters ,etc

Features :

- Silver Plated Type, Low cost designed
- Available on tape and reel for auto surface mounting.



Shape and Dimensions (Dimensions are in mm) :



Item	A	B	C
SMTDR32	3.5±0.3	3.0±0.3	2.0±0.3
SMTDR43	4.5±0.3	4.0±0.3	3.2±0.3
SMTDR52	5.8±0.3	5.2±0.3	2.5±0.3
SMTDR53	5.8±0.3	5.2±0.3	3.0±0.3
SMTDR54	5.8±0.3	5.2±0.3	4.5±0.35
SMTDR73	7.8±0.3	7.0±0.3	3.5±0.5
SMTDR75	7.8±0.3	7.0±0.3	5.0±0.5
SMTDR104	10.0±0.3	9.0±0.3	4.0±0.5
SMTDR105	10.0±0.3	9.0±0.3	5.4±0.4
SMTDR107	10.0±0.3	9.0±0.3	7.5 Max.
SMTDR137	13.0±0.5	13.0±0.5	7.0±0.3

Item	H	I	J
SMTDR32	3.5	1.6	0.8
SMTDR43	4.5	1.75	1.5
SMTDR52	5.5	2.15	1.7
SMTDR53	5.5	2.15	1.7
SMTDR54	5.5	2.15	1.7
SMTDR73	7.5	3.0	2.0
SMTDR75	7.5	3.0	2.0
SMTDR104	9.5	3.75	2.5
SMTDR105	9.5	3.75	2.5
SMTDR107	9.5	3.75	2.5
SMTDR137	14.0	4.75	4.5

Characteristics :

- Saturation Current(Isat):The current when the inductance Becomes 10% lower than is initial value.(Ta=20°C).
- Temperature Rise Current(Irms):The current when the temperature of coil increases up to max. Δ T=40°C.(Ta=20°C)
- Operating temperature : -30°C to 105°C.

Measuring Frequency :

- SMTDR32/43/52/53/54
1.0~8.2uH@ 7.96MHz 0.25V ; 10~82uH@ 2.52MHz 0.25V
100~470uH@ 1kHz 0.25V
- SMTDR73/75/104/105
10~82uH@ 2.52MHz 0.25V ; 100~820uH @ 1kHz 0.25V

Product Identification :

SMT DR105 - 331 K

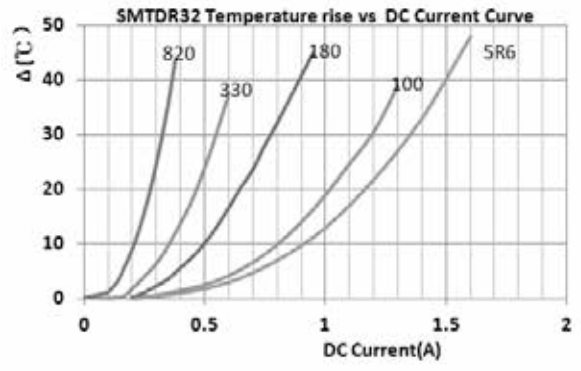
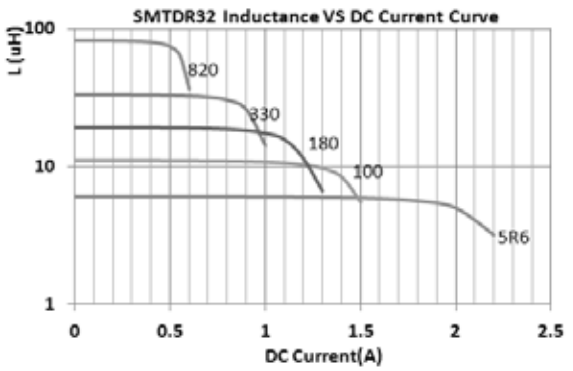
(1) (2) (3) (4)

- (1)Type : **Surface Mountable Type** .
- (2)Style : **DR** Core : **OD**=10mm, **HT**=5.4mm.
- (3)Inductance : **331** for **330** uH.
- (4)Inductance tolerance : "**M**": ±20%; "**L**": ±15%; "**K**": ±10%

- SMTDR107
10~82uH@ 2.52MHz 0.25V ; 100~820uH@ 1kHz 0.25V
- SMTDR137
1.5~1000uH@ 100KHZ 0.1V


● SMTDR32 series

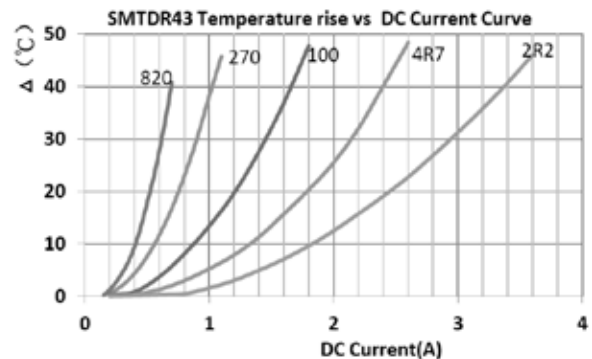
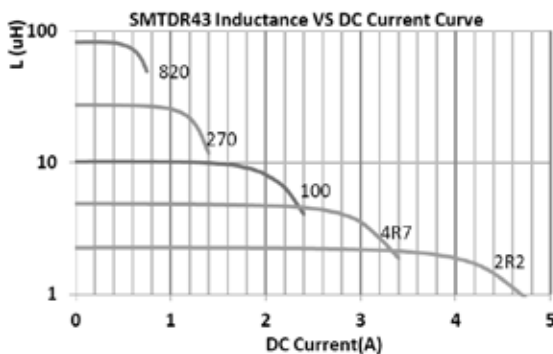
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR32-1R0M	1.0	45m	30m	3.30	4.10	2.60	3.10
SMTDR32-1R2M	1.2	50m	32m	3.00	3.70	2.50	3.00
SMTDR32-1R5M	1.5	55m	44m	2.70	3.40	2.15	2.60
SMTDR32-1R8M	1.8	70m	49m	2.50	3.20	2.00	2.50
SMTDR32-2R2M	2.2	85m	59m	2.30	2.80	1.80	2.20
SMTDR32-2R7M	2.7	100m	65m	2.20	2.70	1.55	1.90
SMTDR32-3R3M	3.3	120m	96m	1.95	2.40	1.45	1.80
SMTDR32-3R9M	3.9	125m	110m	1.85	2.30	1.40	1.60
SMTDR32-4R7M	4.7	135m	120m	1.60	2.00	1.30	1.50
SMTDR32-5R6M	5.6	165m	140m	1.55	1.90	1.25	1.40
SMTDR32-6R8M	6.8	0.20	0.17	1.40	1.75	1.20	1.38
SMTDR32-8R2M	8.2	0.25	0.19	1.20	1.45	1.15	1.35
SMTDR32-100M	10	0.32	0.24	1.05	1.30	1.10	1.30
SMTDR32-120M	12	0.35	0.27	1.00	1.25	0.90	1.05
SMTDR32-150M	15	0.46	0.37	0.90	1.15	0.75	0.90
SMTDR32-180M	18	0.52	0.40	0.80	1.00	0.70	0.85
SMTDR32-220K	22	0.65	0.57	0.75	0.95	0.56	0.66
SMTDR32-270K	27	0.75	0.66	0.70	0.85	0.53	0.63
SMTDR32-330K	33	0.92	0.76	0.60	0.75	0.52	0.62
SMTDR32-390K	39	1.12	0.97	0.55	0.72	0.43	0.52
SMTDR32-470K	47	1.27	1.10	0.50	0.65	0.40	0.47
SMTDR32-560K	56	1.50	1.30	0.45	0.58	0.35	0.43
SMTDR32-680K	68	2.00	1.52	0.40	0.50	0.33	0.40
SMTDR32-820K	82	2.15	1.83	0.35	0.47	0.30	0.37
SMTDR32-101K	100	2.80	2.46	0.34	0.42	0.28	0.33
SMTDR32-121K	120	3.40	2.74	0.33	0.41	0.26	0.31
SMTDR32-151K	150	4.20	3.12	0.28	0.35	0.23	0.28
SMTDR32-181K	180	4.50	3.58	0.27	0.34	0.21	0.25
SMTDR32-221K	220	5.70	5.05	0.25	0.31	0.19	0.23
SMTDR32-271K	270	8.50	5.92	0.22	0.27	0.17	0.20
SMTDR32-331K	330	9.50	6.96	0.19	0.24	0.15	0.18

Typical Performance curves:



● SMTDR43 series

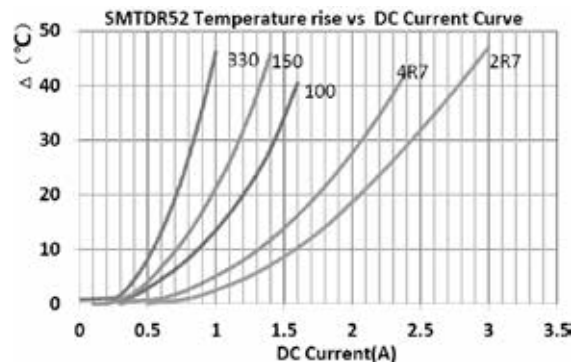
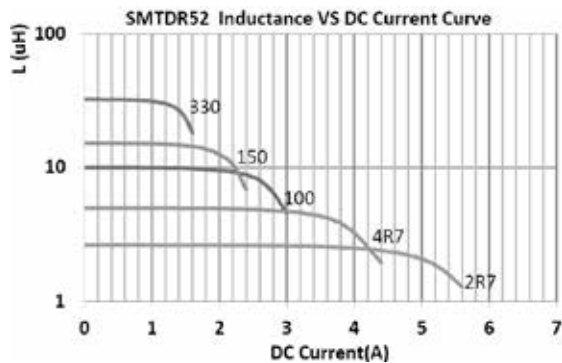
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR43-1R0M	1.0	26m	17m	3.85	4.80	3.40	4.20
SMTDR43-1R4M	1.4	35m	23m	3.44	4.30	3.00	3.70
👍 SMTDR43-2R2M	2.2	42m	<u>28m</u>	2.80	<u>3.50</u>	2.75	3.40
👍 SMTDR43-2R7M	2.7	48m	<u>32m</u>	2.75	<u>3.45</u>	2.45	3.15
👍 SMTDR43-3R3M	3.3	60m	<u>40m</u>	2.48	<u>3.10</u>	2.35	2.85
👍 SMTDR43-3R9M	3.9	65m	<u>43m</u>	2.32	<u>2.90</u>	2.00	2.60
👍 SMTDR43-4R7M	4.7	76m	56m	2.00	<u>2.50</u>	1.98	2.40
SMTDR43-5R6M	5.6	103m	76m	1.96	2.45	1.80	2.20
SMTDR43-6R8M	6.8	119m	88m	1.60	2.00	1.62	2.00
👍 SMTDR43-8R2M	8.2	134m	<u>99m</u>	1.52	<u>1.90</u>	1.42	1.82
👍 SMTDR43-100M	10	0.14	0.11	1.44	<u>1.80</u>	1.38	1.62
SMTDR43-120M	12	0.19	0.15	1.24	1.55	1.30	1.50
👍 SMTDR43-150M	15	0.21	<u>0.17</u>	1.12	1.40	1.18	1.42
SMTDR43-180M	18	0.27	0.22	1.00	1.25	1.05	1.30
👍 SMTDR43-220M	22	0.31	<u>0.25</u>	0.96	1.20	0.98	1.20
👍 SMTDR43-270M	27	0.36	<u>0.29</u>	0.84	<u>1.05</u>	0.85	1.05
👍 SMTDR43-330K	33	0.42	<u>0.34</u>	0.76	<u>0.95</u>	0.82	<u>1.00</u>
👍 SMTDR43-390K	39	0.48	<u>0.39</u>	0.74	<u>0.92</u>	0.78	<u>0.92</u>
👍 SMTDR43-470K	47	0.56	0.45	0.68	<u>0.85</u>	0.74	<u>0.90</u>
👍 SMTDR43-560K	56	0.81	<u>0.65</u>	0.63	<u>0.78</u>	0.65	<u>0.80</u>
👍 SMTDR43-680K	68	0.92	<u>0.74</u>	0.50	0.62	0.58	<u>0.70</u>
SMTDR43-820K	82	1.06	0.85	0.46	0.58	0.55	0.65
SMTDR43-101K	100	1.18	0.95	0.45	0.57	0.52	0.62
SMTDR43-121K	120	1.31	1.05	0.44	0.56	0.46	0.56
SMTDR43-151K	150	1.97	1.58	0.37	0.46	0.38	0.47
SMTDR43-181K	180	2.55	2.04	0.30	0.38	0.33	0.42
SMTDR43-221K	220	2.90	2.32	0.29	0.37	0.32	0.39
SMTDR43-271K	270	3.31	2.65	0.27	0.34	0.30	0.37
SMTDR43-331K	330	6.92	5.54	0.24	0.30	0.20	0.24

👍 : The figures underlined mean the electrical characteristics are beyond competitors. Others, same as standards.

Typical Performance curves:


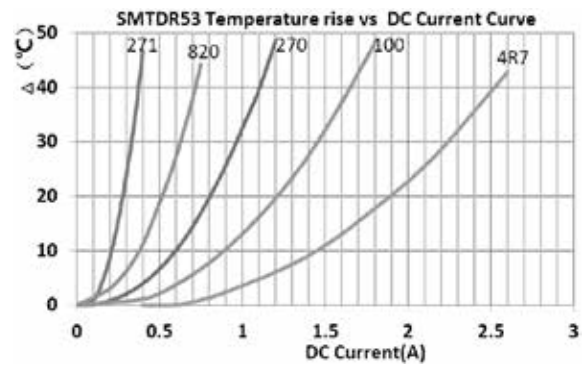
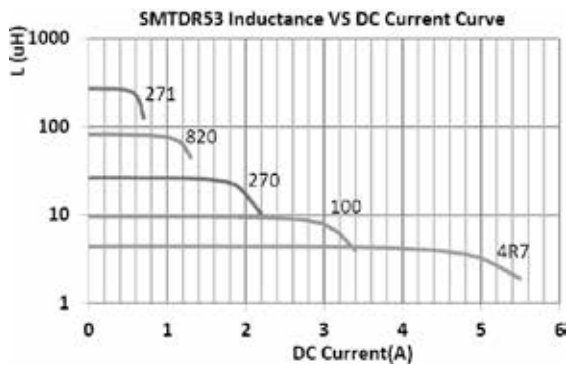

● SMTDR52 series

Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR52-1R2M	1.2	50m	17m	5.20	6.50	3.10	3.90
SMTDR52-1R5M	1.5	60m	21m	4.60	5.80	2.80	3.50
SMTDR52-1R8M	1.8	65m	25m	4.00	5.00	2.60	3.20
SMTDR52-2R2M	2.2	70m	30m	3.60	4.50	2.40	2.90
SMTDR52-2R7M	2.7	80m	35m	3.50	4.40	2.30	2.80
SMTDR52-3R3M	3.3	100m	40m	2.85	3.70	2.20	2.70
SMTDR52-3R9M	3.9	120m	45m	2.80	3.50	2.10	2.50
SMTDR52-4R7M	4.7	140m	69m	2.65	3.30	1.98	2.35
SMTDR52-5R6M	5.6	150m	76m	2.48	3.10	1.50	1.90
SMTDR52-6R8M	6.8	160m	84m	2.16	2.70	1.45	1.80
SMTDR52-8R2M	8.2	0.17	0.10	2.00	2.50	1.42	1.78
SMTDR52-100M	10	0.20	0.12	1.85	2.30	1.37	1.60
SMTDR52-120M	12	0.23	0.14	1.60	2.00	1.21	1.58
SMTDR52-150M	15	0.25	0.20	1.45	1.80	1.10	1.32
SMTDR52-180M	18	0.30	0.22	1.35	1.70	1.08	1.28
SMTDR52-220K	22	0.35	0.26	1.20	1.50	1.00	1.20
SMTDR52-270K	27	0.40	0.29	1.10	1.40	0.99	1.18
SMTDR52-330K	33	0.50	0.35	0.95	1.20	0.79	0.95
SMTDR52-390K	39	0.55	0.43	0.88	1.10	0.78	0.90
SMTDR52-470K	47	0.65	0.57	0.84	1.05	0.68	0.80
SMTDR52-560K	56	0.75	0.64	0.80	1.00	0.61	0.78
SMTDR52-680K	68	0.95	0.75	0.70	0.90	0.59	0.70
SMTDR52-820K	82	1.20	0.86	0.65	0.80	0.57	0.69
SMTDR52-101K	100	1.40	1.16	0.55	0.70	0.48	0.58
SMTDR52-121K	120	1.75	1.31	0.50	0.65	0.46	0.56
SMTDR52-151K	150	2.00	1.53	0.48	0.60	0.40	0.49
SMTDR52-181K	180	2.60	1.98	0.45	0.55	0.35	0.44
SMTDR52-221K	220	3.00	2.34	0.40	0.50	0.32	0.40
SMTDR52-271K	270	3.70	3.15	0.35	0.45	0.26	0.32
SMTDR52-331K	330	4.30	3.77	0.32	0.40	0.25	0.31
SMTDR52-391K	390	6.00	4.75	0.30	0.38	0.24	0.29
SMTDR52-471K	470	6.70	5.54	0.28	0.35	0.22	0.27

Typical Performance curves:



● SMTDR53 series

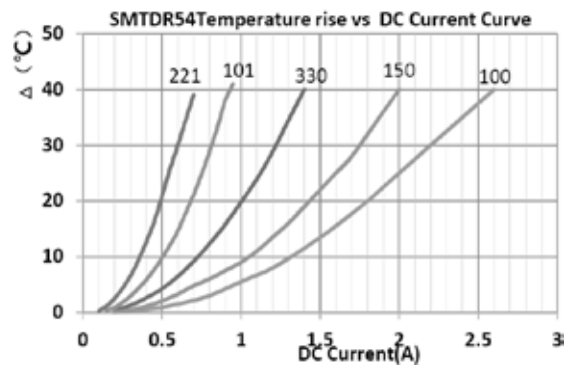
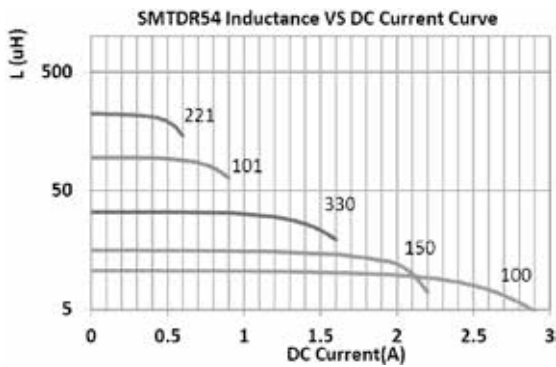
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR53-1R0M	1.0	18m	13m	6.70	8.40	5.10	6.50
SMTDR53-1R2M	1.2	22m	16m	6.00	7.50	4.10	5.40
SMTDR53-1R5M	1.5	26m	19m	5.60	7.00	4.05	5.10
SMTDR53-1R8M	1.8	28m	21m	5.60	7.00	4.00	5.00
SMTDR53-2R2M	2.2	30m	26m	4.40	5.50	3.70	4.70
SMTDR53-2R7M	2.7	40m	31m	4.25	5.30	3.30	4.20
SMTDR53-3R3M	3.3	50m	35m	4.00	5.00	3.10	3.90
SMTDR53-3R9M	3.9	60m	38m	3.60	4.50	3.00	3.70
SMTDR53-4R7M	4.7	70m	51m	3.15	4.20	2.15	2.50
SMTDR53-5R6M	5.6	80m	60m	2.88	3.60	2.05	2.45
SMTDR53-6R8M	6.8	90m	65m	2.75	3.40	1.98	2.38
SMTDR53-8R2M	8.2	100m	70m	2.65	3.30	1.58	1.90
SMTDR53-100M	10	0.13	0.10	2.15	2.70	1.38	1.65
SMTDR53-120M	12	0.16	0.12	2.00	2.50	1.30	1.62
SMTDR53-150M	15	0.19	0.15	1.85	2.30	1.20	1.50
SMTDR53-180M	18	0.21	0.17	1.68	2.10	1.17	1.40
SMTDR53-220K	22	0.28	0.19	1.45	1.80	1.05	1.30
SMTDR53-270K	27	0.32	0.24	1.35	1.70	0.90	1.10
SMTDR53-330K	33	0.38	0.28	1.20	1.50	0.88	1.08
SMTDR53-390K	39	0.42	0.32	1.10	1.40	0.80	1.00
SMTDR53-470K	47	0.52	0.40	1.05	1.35	0.75	0.90
SMTDR53-560K	56	0.56	0.47	0.95	1.20	0.70	0.88
SMTDR53-680K	68	0.68	0.56	0.88	1.10	0.69	0.85
SMTDR53-820K	82	0.82	0.64	0.80	1.00	0.57	0.72
SMTDR53-101K	100	1.10	0.88	0.75	0.95	0.46	0.65
SMTDR53-121K	120	1.20	1.02	0.68	0.85	0.48	0.59
SMTDR53-151K	150	1.50	1.34	0.64	0.80	0.43	0.53
SMTDR53-181K	180	1.80	1.45	0.56	0.70	0.42	0.50
SMTDR53-221K	220	2.00	1.64	0.48	0.60	0.36	0.44
SMTDR53-271K	270	2.90	2.32	0.44	0.55	0.31	0.38
SMTDR53-331K	330	3.30	2.67	0.40	0.50	0.28	0.34
SMTDR53-391K	390	3.70	3.01	0.38	0.48	0.26	0.32
SMTDR53-471K	470	4.90	3.74	0.36	0.45	0.24	0.28

Typical Performance curves:



● SMTDR54 series

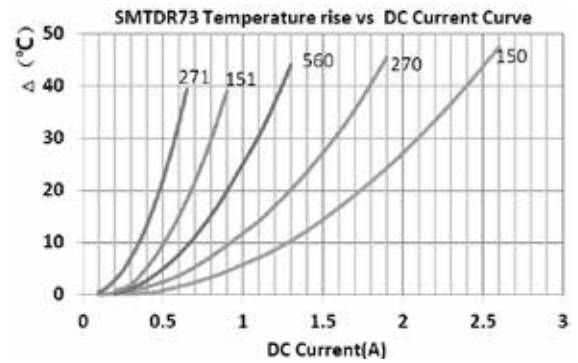
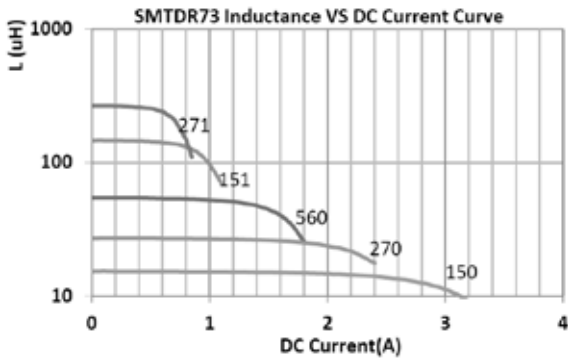
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
👍 SMTDR54-100M	10	100m	<u>60m</u>	1.60	2.00	2.00	<u>2.60</u>
SMTDR54-120M	12	120m	69m	1.44	1.80	1.80	2.20
SMTDR54-150M	15	140m	81m	1.28	1.60	1.60	2.00
SMTDR54-180M	18	150m	90m	1.16	1.45	1.56	1.90
SMTDR54-220M	22	0.18	0.11	1.12	1.40	1.37	1.70
SMTDR54-270M	27	0.20	0.13	1.04	1.30	1.20	1.50
SMTDR54-330K	33	0.23	0.15	0.96	1.20	1.15	1.40
SMTDR54-390K	39	0.32	0.21	0.85	1.05	1.10	1.35
SMTDR54-470K	47	0.37	0.24	0.80	1.00	1.05	1.30
SMTDR54-560K	56	0.42	0.27	0.72	0.90	0.95	1.20
SMTDR54-680K	68	0.46	0.31	0.68	0.85	0.90	1.10
SMTDR54-820K	82	0.60	0.40	0.64	0.80	0.80	1.00
👍 SMTDR54-101K	100	<u>0.70</u>	<u>0.45</u>	<u>0.56</u>	<u>0.70</u>	<u>0.75</u>	<u>0.90</u>
👍 SMTDR54-121K	120	<u>0.93</u>	<u>0.52</u>	<u>0.52</u>	<u>0.65</u>	<u>0.70</u>	<u>0.85</u>
👍 SMTDR54-151K	150	<u>1.10</u>	<u>0.75</u>	<u>0.44</u>	<u>0.55</u>	<u>0.62</u>	<u>0.80</u>
👍 SMTDR54-181K	180	<u>1.38</u>	<u>0.90</u>	<u>0.40</u>	<u>0.50</u>	<u>0.58</u>	<u>0.75</u>
👍 SMTDR54-221K	220	<u>1.57</u>	<u>1.05</u>	<u>0.36</u>	<u>0.45</u>	<u>0.55</u>	<u>0.70</u>
SMTDR54-271K	270	1.65	1.25	0.33	0.41	0.50	0.65
SMTDR54-331K	330	1.80	1.43	0.30	0.38	0.45	0.60

👍 : The figures underlined mean the electrical characteristics are beyond competitors. Others, same as standards.

Typical Performance curves:



● SMTDR73 series

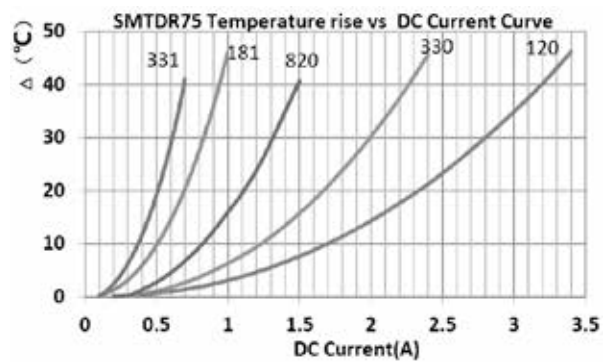
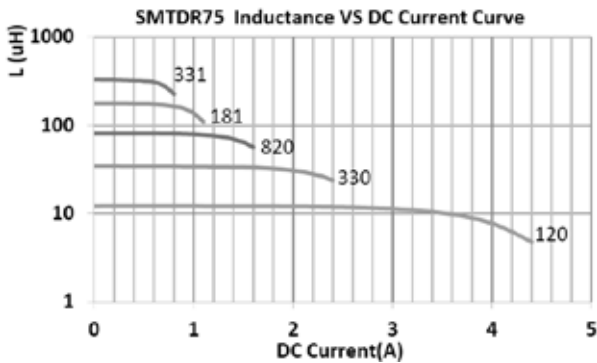
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR73-100K	10	80m	45m	2.40	3.00	2.40	3.00
SMTDR73-120K	12	90m	55m	2.15	2.70	2.35	2.80
SMTDR73-150K	15	100m	71m	1.92	2.40	1.95	2.40
SMTDR73-180K	18	110m	83m	1.85	2.30	1.80	2.25
SMTDR73-220K	22	130m	94m	1.60	2.00	1.70	2.15
SMTDR73-270K	27	0.15	0.12	1.52	1.90	1.45	1.80
SMTDR73-330K	33	0.19	0.16	1.28	1.60	1.40	1.70
SMTDR73-390K	39	0.22	0.18	1.24	1.55	1.30	1.60
SMTDR73-470K	47	0.25	0.21	1.12	1.40	1.25	1.55
SMTDR73-560K	56	0.28	0.24	1.08	1.35	1.00	1.25
SMTDR73-680K	68	0.33	0.31	0.92	1.15	0.95	1.20
SMTDR73-820K	82	0.46	0.38	0.84	1.05	0.90	1.10
SMTDR73-101K	100	0.48	0.41	0.78	0.98	0.88	1.08
SMTDR73-121K	120	0.54	0.46	0.72	0.90	0.85	1.05
SMTDR73-151K	150	0.76	0.63	0.60	0.75	0.75	0.90
SMTDR73-181K	180	1.02	0.83	0.56	0.70	0.62	0.75
SMTDR73-221K	220	1.20	0.98	0.52	0.65	0.58	0.70
SMTDR73-271K	270	1.31	1.08	0.48	0.60	0.52	0.65
SMTDR73-331K	330	1.50	1.26	0.44	0.55	0.51	0.62

Typical Performance curves:



● SMTDR75 series

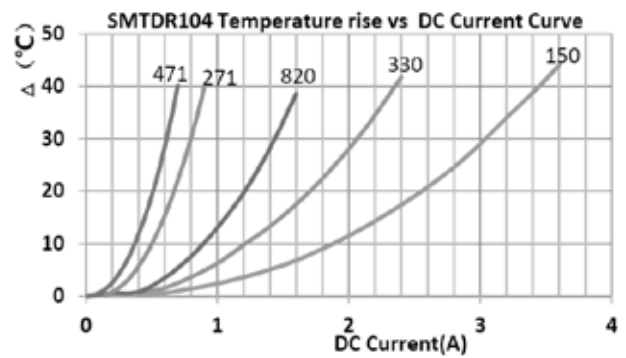
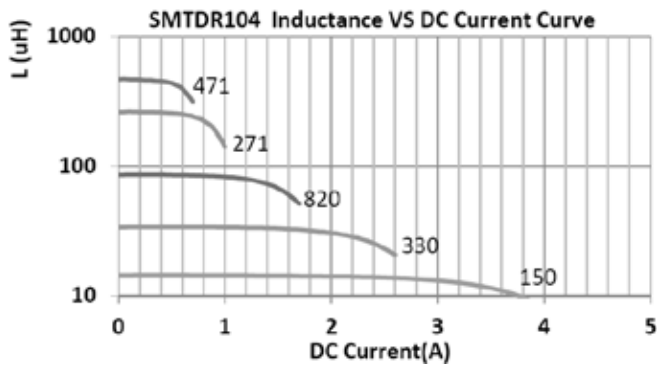
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
👍 SMTDR75-100K	10	70m	<u>33m</u>	2.88	<u>3.60</u>	3.20	<u>3.80</u>
SMTDR75-120K	12	80m	46m	2.56	3.20	2.60	3.20
SMTDR75-150K	15	90m	53m	2.25	2.80	2.55	3.10
SMTDR75-180K	18	100m	59m	2.08	2.60	2.25	2.80
SMTDR75-220K	22	110m	70m	1.95	2.40	2.10	2.60
SMTDR75-270K	27	120m	87m	1.75	2.20	1.98	2.40
SMTDR75-330K	33	0.13	0.10	1.52	1.90	1.82	2.25
👍 SMTDR75-390K	39	0.16	<u>0.12</u>	1.44	<u>1.80</u>	1.62	<u>2.00</u>
👍 SMTDR75-470K	47	0.18	<u>0.14</u>	1.28	<u>1.60</u>	1.50	<u>1.90</u>
👍 SMTDR75-560K	56	0.24	<u>0.17</u>	1.20	<u>1.50</u>	1.43	<u>1.80</u>
👍 SMTDR75-680K	68	0.28	<u>0.20</u>	1.12	<u>1.40</u>	1.30	<u>1.60</u>
👍 SMTDR75-820K	82	0.37	<u>0.23</u>	1.04	<u>1.30</u>	1.23	<u>1.50</u>
SMTDR75-101K	100	0.43	0.28	0.92	1.15	1.08	1.32
SMTDR75-121K	120	0.47	0.35	0.80	1.00	0.99	1.20
👍 SMTDR75-151K	150	0.64	<u>0.40</u>	0.72	<u>0.90</u>	0.90	<u>1.10</u>
👍 SMTDR75-181K	180	0.71	<u>0.53</u>	0.68	<u>0.85</u>	0.76	<u>0.94</u>
👍 SMTDR75-221K	220	0.96	<u>0.61</u>	0.64	<u>0.80</u>	0.70	<u>0.85</u>
SMTDR75-271K	270	1.11	0.72	0.56	0.70	0.65	0.80
SMTDR75-331K	330	1.26	0.95	0.52	0.65	0.58	0.70
SMTDR75-391K	390	1.77	1.28	0.44	0.55	0.49	0.60
SMTDR75-471K	470	1.96	1.46	0.40	0.50	0.47	0.58

👍 : The figures underlined mean the electrical characteristics are beyond competitors. Others, same as standards.

Typical Performance curves:



● SMTDR104 series

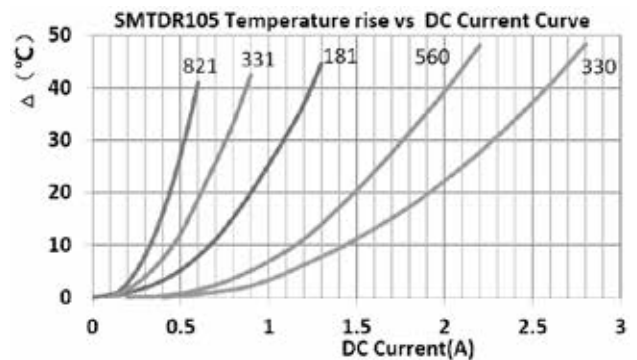
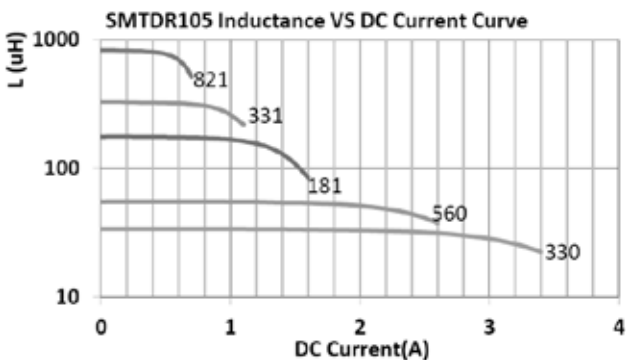
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR104-100M	10	53m	30m	2.90	3.60	3.50	4.30
SMTDR104-120M	12	61m	37m	2.55	3.20	2.90	3.60
SMTDR104-150M	15	70m	44m	2.40	3.00	2.80	3.48
SMTDR104-180M	18	81m	52m	2.10	2.60	2.58	3.20
SMTDR104-220M	22	90m	66m	1.90	2.40	2.40	2.98
SMTDR104-270M	27	100m	84m	1.65	2.10	2.00	2.55
SMTDR104-330M	33	0.12	0.10	1.60	2.00	1.90	2.38
SMTDR104-390M	39	0.15	0.11	1.44	1.80	1.80	2.20
SMTDR104-470M	47	0.17	0.14	1.35	1.70	1.59	1.95
SMTDR104-560K	56	0.20	0.16	1.20	1.50	1.50	1.82
SMTDR104-680K	68	0.22	0.19	1.15	1.40	1.40	1.62
SMTDR104-820K	82	0.25	0.22	1.00	1.20	1.35	1.60
SMTDR104-101K	100	0.34	0.26	0.88	1.10	1.20	1.48
SMTDR104-121K	120	0.40	0.30	0.80	1.00	1.10	1.38
SMTDR104-151K	150	0.54	0.38	0.75	0.90	0.99	1.20
SMTDR104-181K	180	0.62	0.44	0.64	0.80	0.90	1.10
SMTDR104-221K	220	0.72	0.58	0.60	0.75	0.80	0.98
SMTDR104-271K	270	0.95	0.68	0.56	0.70	0.75	0.90
SMTDR104-331K	330	1.10	0.88	0.52	0.65	0.64	0.78
SMTDR104-391K	390	1.25	0.99	0.48	0.60	0.60	0.75
SMTDR104-471K	470	1.53	1.13	0.40	0.50	0.57	0.70
SMTDR104-561K	560	1.90	1.40	0.35	0.45	0.50	0.63

Typical Performance curves:



● SMTDR105 series

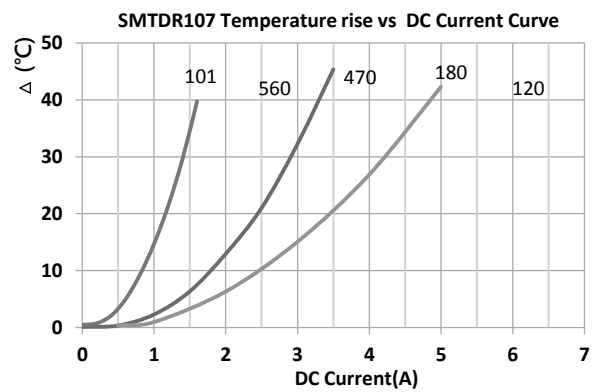
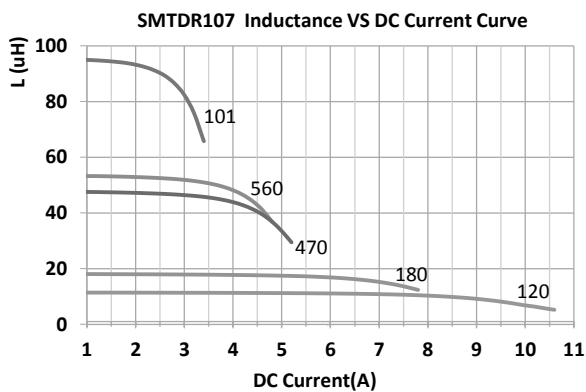
Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
👍 SMTDR105-100M	10	60m	<u>26m</u>	4.00	<u>5.00</u>	4.00	<u>4.50</u>
👍 SMTDR105-120M	12	70m	<u>31m</u>	3.50	<u>4.40</u>	3.50	<u>4.25</u>
SMTDR105-150M	15	80m	36m	3.05	3.80	2.70	3.48
SMTDR105-180M	18	90m	46m	2.90	3.60	2.40	3.10
SMTDR105-220M	22	100m	52m	2.55	3.20	2.38	2.95
👍 SMTDR105-270M	27	110m	<u>62m</u>	2.25	<u>2.80</u>	2.25	<u>2.80</u>
👍 SMTDR105-330M	33	120m	<u>74m</u>	2.10	<u>2.60</u>	2.15	<u>2.60</u>
👍 SMTDR105-390M	39	140m	<u>93m</u>	2.00	<u>2.50</u>	2.00	<u>2.40</u>
SMTDR105-470K	47	0.17	0.10	1.95	2.40	1.80	2.20
SMTDR105-560K	56	0.19	0.12	1.70	2.10	1.62	2.02
SMTDR105-680K	68	0.22	0.15	1.50	1.90	1.58	1.97
SMTDR105-820K	82	0.25	0.18	1.35	1.70	1.30	1.60
SMTDR105-101K	100	0.35	0.21	1.20	1.50	1.28	1.58
👍 SMTDR105-121K	120	0.40	<u>0.24</u>	1.15	<u>1.40</u>	1.15	<u>1.45</u>
👍 SMTDR105-151K	150	0.47	<u>0.30</u>	1.05	<u>1.30</u>	1.10	<u>1.39</u>
SMTDR105-181K	180	0.63	0.36	0.88	1.10	1.00	1.25
SMTDR105-221K	220	0.73	0.45	0.85	1.05	0.96	1.18
SMTDR105-271K	270	0.97	0.56	0.80	1.00	0.82	1.00
SMTDR105-331K	330	1.15	0.65	0.76	0.95	0.70	0.89
SMTDR105-391K	390	1.30	0.75	0.65	0.80	0.65	0.80
👍 SMTDR105-471K	470	1.48	<u>0.93</u>	0.56	<u>0.70</u>	0.62	<u>0.78</u>
SMTDR105-561K	560	1.90	1.10	0.52	0.65	0.60	0.74
SMTDR105-681K	680	2.25	1.30	0.48	0.60	0.54	0.65
SMTDR105-821K	820	2.55	1.65	0.44	0.55	0.49	0.60

👍 : The figures underlined mean the electrical characteristics are beyond competitors. Others, same as standards.

Typical Performance curves:


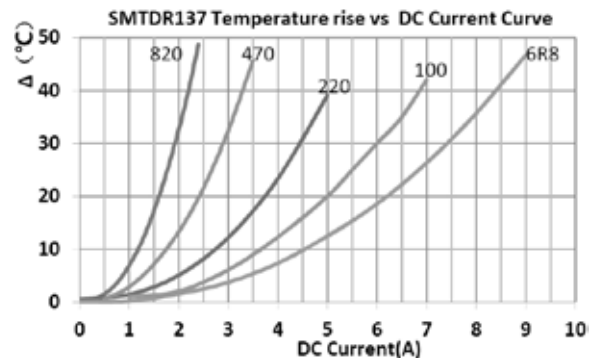
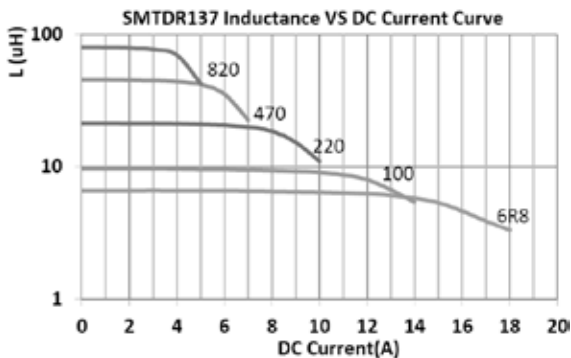

● SMTDR107 series

Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR107-100M	10	34m	26m	7.31	8.60	5.20	6.10
SMTDR107-120M	12	37m	27m	6.80	8.00	5.00	6.00
SMTDR107-150M	15	46m	37m	6.12	7.20	4.30	5.10
SMTDR107-180M	18	52m	41m	5.44	6.40	3.90	4.80
SMTDR107-220M	22	66m	48m	5.10	6.00	3.80	4.70
SMTDR107-270M	27	78m	63m	4.76	5.60	3.25	4.05
SMTDR107-330M	33	89m	71m	4.25	5.00	3.10	3.90
SMTDR107-390M	39	116m	92m	3.91	4.60	2.70	3.30
SMTDR107-470M	47	0.12	0.10	3.57	4.20	2.60	3.25
SMTDR107-560M	56	0.15	0.12	3.40	4.00	2.05	2.50
SMTDR107-680M	68	0.18	0.15	3.06	3.60	1.98	2.40
SMTDR107-820M	82	0.21	0.17	2.72	3.20	1.60	2.00
SMTDR107-101K	100	0.27	0.22	2.47	2.90	1.50	1.80
SMTDR107-121K	120	0.29	0.25	2.30	2.70	1.40	1.60
SMTDR107-151K	150	0.38	0.31	1.96	2.30	1.30	1.50
SMTDR107-181K	180	0.43	0.35	1.87	2.20	1.18	1.45
SMTDR107-221K	220	0.54	0.44	1.70	2.00	0.98	1.20
SMTDR107-271K	270	0.62	0.50	1.53	1.80	0.90	1.10
SMTDR107-331K	330	0.81	0.68	1.28	1.50	0.78	0.95
SMTDR107-391K	390	0.90	0.76	1.19	1.40	0.75	0.92
SMTDR107-471K	471	1.00	0.86	1.08	1.35	0.70	0.85
SMTDR107-561K	560	1.29	1.06	1.02	1.20	0.65	0.78
SMTDR107-681K	680	1.66	1.40	0.94	1.10	0.53	0.65
SMTDR107-821K	820	1.92	1.60	0.77	0.90	0.50	0.62

Typical Performance curves:



● SMTDR137 series

Part NO.	L(uH)	DCR(Ω)		I sat (A)		I rms (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
SMTDR137-1R5M	1.5	5.0m	2.97m	24.7	29.0	10.2	12.5
SMTDR137-2R2M	2.2	8.0m	4.40m	19.6	23.0	9.80	11.5
SMTDR137-2R7M	2.7	8.0m	5.30m	17.0	20.0	8.60	10.6
SMTDR137-3R3M	3.3	8.7m	6.30m	14.5	17.0	8.50	10.5
SMTDR137-4R7M	4.7	12m	9.00m	13.6	16.0	7.00	8.60
SMTDR137-5R6M	5.6	15m	10.3m	12.8	15.0	6.90	8.50
SMTDR137-6R8M	6.8	17m	11.6m	11.1	13.0	6.80	8.20
SMTDR137-8R2M	8.2	19m	16.5m	10.2	12.0	5.90	7.20
SMTDR137-100M	10	23m	18.4m	9.4	11.0	5.50	6.80
SMTDR137-120M	12	30m	20.5m	8.5	10.0	5.40	6.60
SMTDR137-150M	15	34m	26.8m	7.5	8.80	5.00	6.00
SMTDR137-180M	18	40m	29.0m	6.8	8.00	4.40	5.50
SMTDR137-220M	22	52m	38.0m	6.0	7.00	4.10	5.10
SMTDR137-270M	27	60m	43.0m	5.5	6.50	3.40	4.20
SMTDR137-330K	33	70m	55.5m	5.3	6.20	3.10	3.80
SMTDR137-390K	39	75m	61.5m	4.8	5.60	2.80	3.50
SMTDR137-470K	47	82m	71.0m	4.4	5.20	2.60	3.26
SMTDR137-560K	56	112m	91.0m	3.7	4.40	2.25	2.75
SMTDR137-680K	68	0.13	0.106	3.6	4.20	2.10	2.60
SMTDR137-820K	82	0.17	0.135	3.2	3.80	1.80	2.20
SMTDR137-101K	100	0.18	0.159	3.0	3.50	1.78	2.18
SMTDR137-121K	120	0.23	0.189	2.6	3.00	1.60	2.00
SMTDR137-151K	150	0.26	0.226	2.4	2.80	1.50	1.80
SMTDR137-181K	180	0.35	0.282	2.1	2.50	1.40	1.70
SMTDR137-221K	220	0.38	0.322	2.0	2.40	1.20	1.50
SMTDR137-271K	270	0.48	0.406	1.8	2.10	1.05	1.35
SMTDR137-331K	330	0.52	0.475	1.7	2.00	1.00	1.28
SMTDR137-391K	390	0.65	0.578	1.5	1.80	0.98	1.18
SMTDR137-471K	470	0.80	0.687	1.4	1.60	0.90	1.08
SMTDR137-561K	560	1.10	0.810	1.3	1.50	0.80	0.98
SMTDR137-681K	680	1.15	1.042	1.1	1.30	0.70	0.85
SMTDR137-821K	820	1.60	1.277	1.0	1.20	0.65	0.78
SMTDR137-102K	1000	1.70	1.503	0.9	1.10	0.60	0.75

Typical Performance curves:


* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.