

LHP Series INDEX


LHP2016-P Series.....	2
LHP201610P(2.0 x 1.6 x 1.0mm).....	3
LHP201612P(2.0 x 1.6 x 1.2mm).....	4
LHP2520-P Series.....	5
LHP252010P(2.5 x 2.0 x 1.0mm).....	6
LHP252012P(2.5 x 2.0 x 1.2mm).....	7
LHP3225 Series.....	8
LHP322512(3.2 x 2.5 x 1.2mm).....	9
LHP322520(3.2 x 2.5 x 2.0mm).....	10

LHP2016-P SERIES


HIGH POWER INDUCTOR

Applications:

- DC/DC converter for CPU in Notebook PC
- Cellular phones, LCD displays, HDDs, DVCs, PDAs etc..
- Thin type on-board power supply module for exchanger
- VRM for server

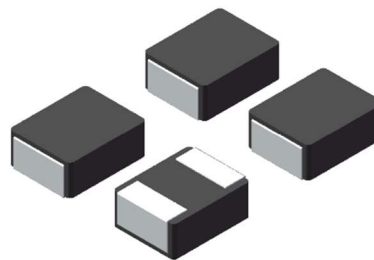

Shape and Dimensions (Dimensions are in mm)

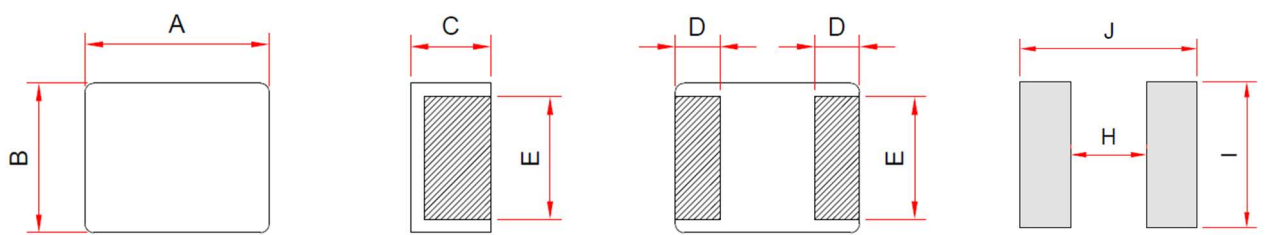

Item	A	B	C	D	E	H	I	J
LHP201610P	2.0±0.2	1.6±0.2	0.8±0.2	0.5±0.3	1.4±0.2	0.7	1.8	2.3
LHP201612P	2.0±0.2	1.6±0.2	1.0±0.2	0.5±0.3	1.4±0.2	0.7	1.8	2.3

Features :

- High performance (I_{sat}) realized by metal dust core.
- Low profile: 1.0~1.2mm
- Low loss realized with low DCR
- Magnetically Shielded.
- RoHS compliant.

Product Identification:

LHP 201610P - 1R0 M

(1) (2) (3) (4)

(1) Product Symbol

(2) Dimensions : **201610** is size.

(3) Inductance: **1R0** for 1.0uH.

(4) Inductance tolerance: **M**: ± 20%

Characteristics:

- Saturation Current (I_{sat}) : The current will cause L_0 to drop approximately 30% typical
- Temperature Rise Current (I_{rms}) : The current will cause the coil temperature rise approximately $\Delta T=40^\circ C$
- Operating Temperature : $-55^\circ C$ to $125^\circ C$

Test equipment :

- L: Agilent E4980 Precision LCR Meter
(Upgraded version of Agilent HP4284A)
with HP42841A Current Source
- DCR: Chroma16502 Milli-ohm meter.

● LHP201610P Series

Part No.	Inductance L(μ H)	Tolerance (\pm %)	DCR($m\Omega$)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
LHP201610P-R24M	0.24	20	15	19	7.5	6.5	6.5	5.5
LHP201610P-R47M	0.47	20	25	31	5.4	4.8	4.5	4.1
LHP201610P-1R0M	1.0	20	53	65	4.0	3.6	3.2	2.6
LHP201610P-1R5M	1.5	20	74	90	3.0	2.6	2.1	1.8
LHP201610P-2R2M	2.2	20	122	140	2.7	2.3	1.9	1.6
LHP201610P-3R3M	3.3	20	205	235	2.1	1.8	1.5	1.3
LHP201610P-4R7M	4.7	20	285	342	1.4	1.2	0.8	0.6

If you require another part number please contact with us.

Note 1: Referenced ambient temperature 25°C.

Note 2: Test Condition :1MHz ,1.0 Vrms.

Note 3: Isat (Typ) : DC current (A) that will cause L0 to drop approximately 30%

Isat (Max) : DC current (A) that will cause L0 to drop 30% Max


Irms (Typ) : DC current (A) that will cause an approximate ΔT of 40°C

Irms (Max) : DC current (A) that will cause an ΔT of 40°C Max

Note 4: Operating temperature range includes self-temperature rise.

Note 5: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Typical performance curves :

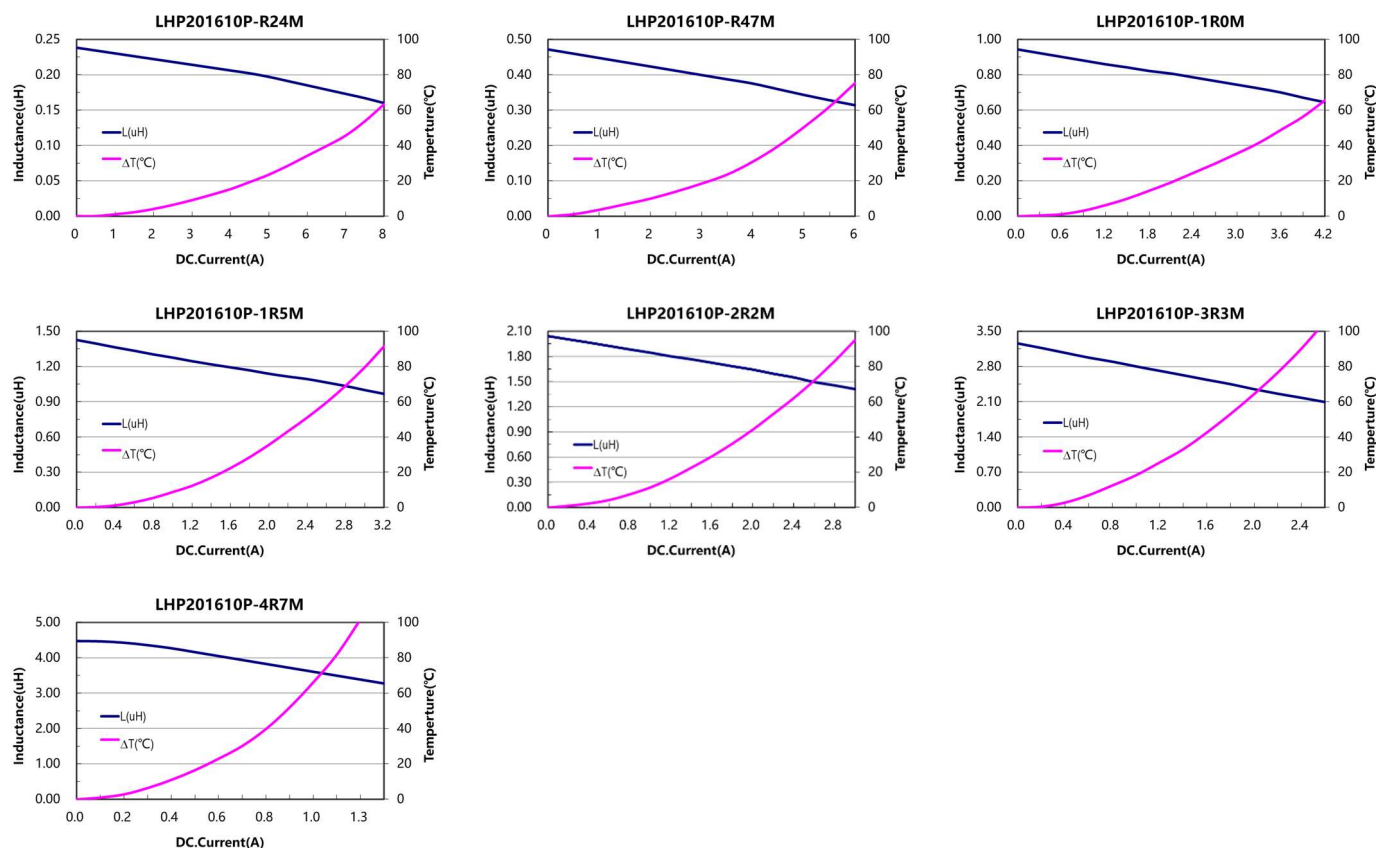

● LHP201612P Series

Part No.	Inductance L(uH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
LHP201612P-R47M	0.47	20	23	28	5.8	5.1	4.5	4.2
LHP201612P-1R0M	1.0	20	41	48	4.0	3.3	3.2	2.8
LHP201612P-1R5M	1.5	20	60	72	3.0	2.7	2.5	2.2
LHP201612P-2R2M	2.2	20	90	110	2.6	2.2	1.9	1.6
LHP201612P-3R3M	3.3	20	156	187	1.9	1.6	1.5	1.2
LHP201612P-4R7M	4.7	20	225	270	1.4	1.2	1.0	0.7

If you require another part number please contact with us.

Note 1: Referenced ambient temperature 25°C.

Note 2: Test Condition :1MHz ,1.0 Vrms.

Note 3: Isat (Typ) : DC current (A) that will cause L0 to drop approximately 30%







Isat (Max) : DC current (A) that will cause L0 to drop 30% Max

Irms (Typ) : DC current (A) that will cause an approximate ΔT of 40°C

Irms (Max) : DC current (A) that will cause an ΔT of 40°C Max

Note 4: Operating temperature range includes self-temperature rise.

Note 5: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

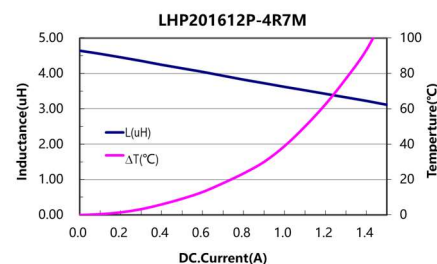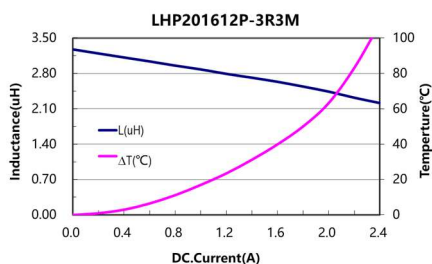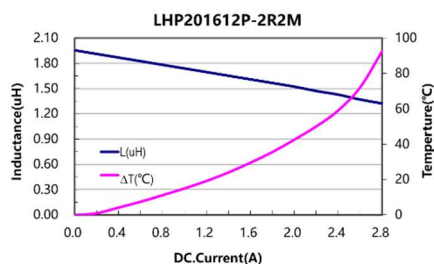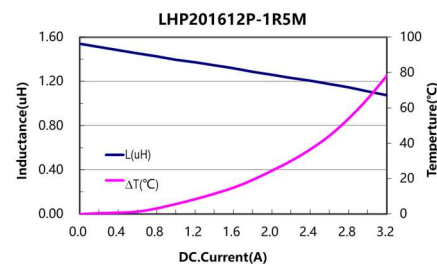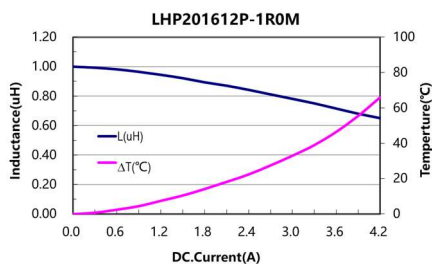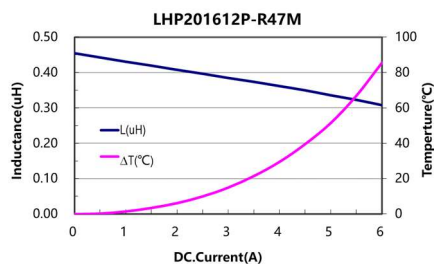

* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.




LHP2520-P SERIES


HIGH POWER INDUCTOR

Applications:

- DC/DC converter for CPU in Notebook PC
- Cellular phones, LCD displays, HDDs, DVCs, PDAs etc..
- Thin type on-board power supply module for exchanger
- VRM for server

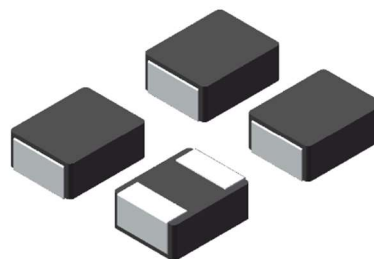

Shape and Dimensions (Dimensions are in mm)

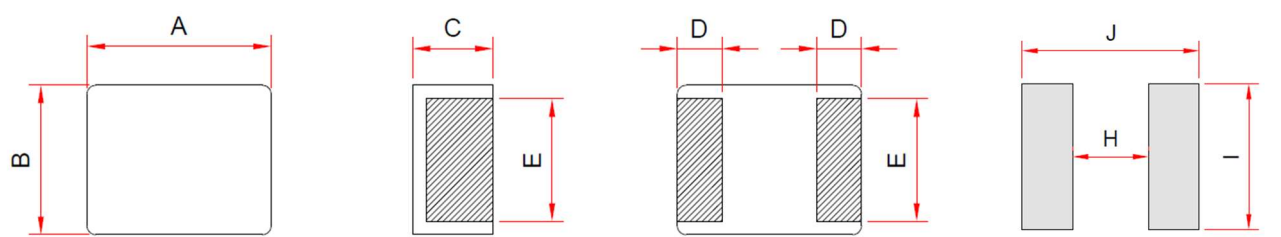

Item	A	B	C	D	E	H	I	J
LHP252010P	2.5±0.2	2.0±0.2	0.8±0.2	0.6±0.3	1.8±0.2	1.2	2.3	2.8
LHP252012P	2.5±0.2	2.0±0.2	1.0±0.2	0.6±0.3	1.8±0.2	1.2	2.3	2.8

Features :

- High performance (I_{sat}) realized by metal dust core.
- Low profile: 1.0~1.2mm
- Low loss realized with low DCR
- Magnetically Shielded.
- RoHS compliant.

Product Identification:

LHP 252010P - 1R0 M

(1) (2) (3) (4)

(1) Product Symbol

(2) Dimensions : **252010** is size.

(3) Inductance: **1R0** for 1.0uH.

(4) Inductance tolerance: **M**: ± 20%

Characteristics:

- Saturation Current (I_{sat}) : The current will cause L_0 to drop approximately 30% typical
- Temperature Rise Current (I_{rms}) : The current will cause the coil temperature rise approximately $\Delta T=40^\circ\text{C}$
- Operating Temperature : -55°C to 125°C

Test equipment :

- L: Agilent E4980 Precision LCR Meter
(Upgraded version of Agilent HP4284A)
with HP42841A Current Source
- DCR: Chroma16502 Milli-ohm meter.

● LHP252010P Series

Part No.	Inductance L(uH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
LHP252010P-R47M	0.47	20	20	25	6.5	5.6	5.2	4.6
LHP252010P-1R0M	1.0	20	38	46	4.4	4.0	4.0	3.8
LHP252010P-1R5M	1.5	20	56	68	3.5	3.0	2.9	2.5
LHP252010P-2R2M	2.2	20	82	97	3.1	2.6	2.3	2.1
LHP252010P-3R3M	3.3	20	140	168	2.5	2.1	1.8	1.6
LHP252010P-4R7M	4.7	20	221	262	1.9	1.7	1.3	1.1
LHP252010P-100M	10.0	20	428	513	0.9	0.7	0.6	0.4

If you require another part number please contact with us.

Note 1: Referenced ambient temperature 25°C.

Note 2: Test Condition :1MHz ,1.0 Vrms.

Note 3: Isat (Typ) : DC current (A) that will cause L0 to drop approximately 30%

Isat (Max) : DC current (A) that will cause L0 to drop 30% Max


Irms (Typ) : DC current (A) that will cause an approximate ΔT of 40°C

Irms (Max) : DC current (A) that will cause an ΔT of 40°C Max

Note 4: Operating temperature range includes self-temperature rise.

Note 5: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Typical performance curves :

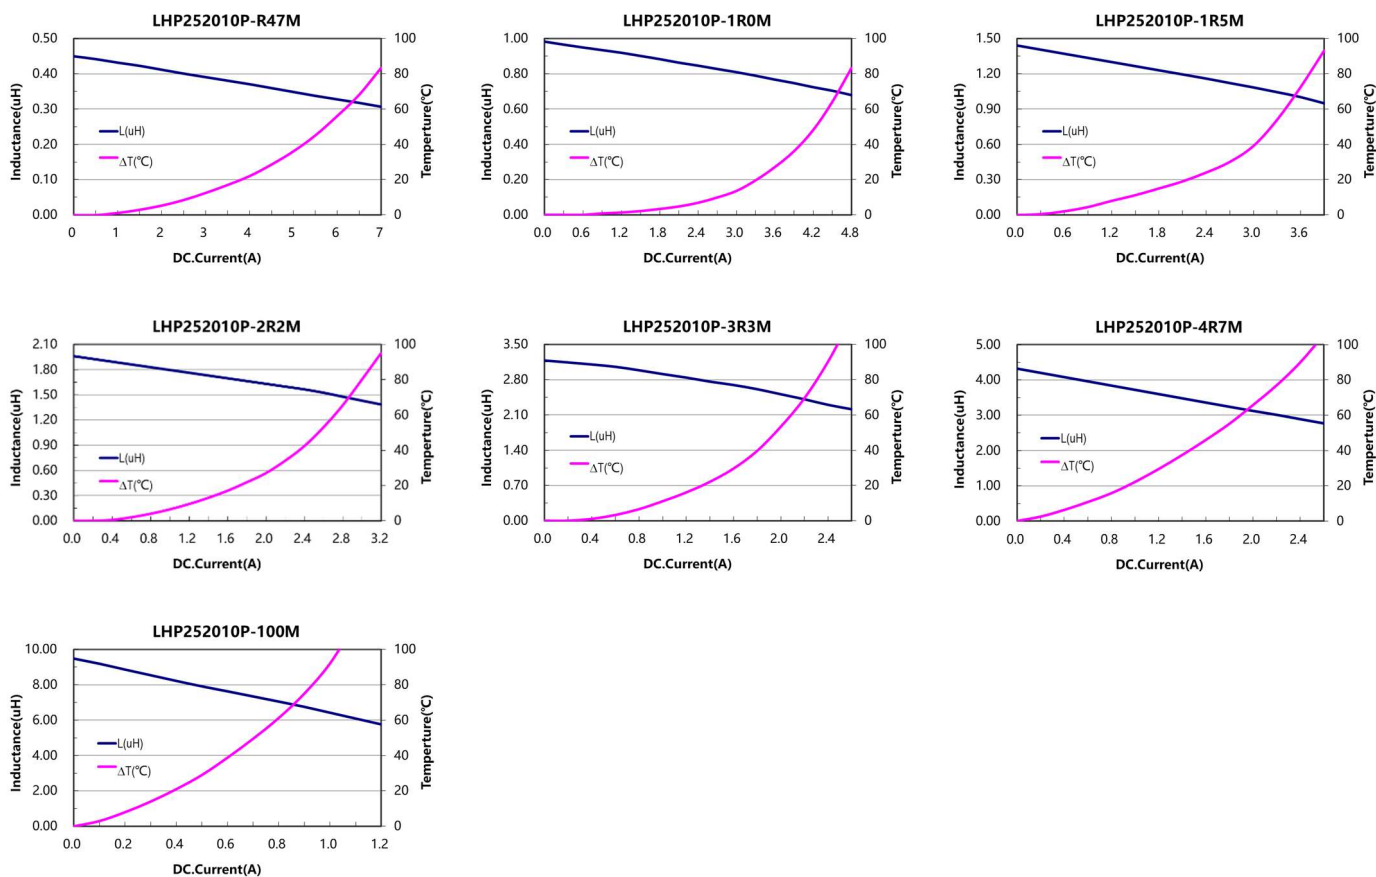

● LHP252012P Series

Part No.	Inductance L(uH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
LHP252012P-R24M	0.24	20	11	15	9.0	8.0	7.2	6.8
LHP252012P-R47M	0.47	20	18	22	7.8	7.0	5.0	4.6
LHP252012P-1R0M	1.0	20	35	42	5.4	4.6	4.0	3.4
LHP252012P-1R5M	1.5	20	51	58	4.2	3.6	3.3	3.0
LHP252012P-2R2M	2.2	20	70	82	3.4	3.0	2.9	2.6
LHP252012P-3R3M	3.3	20	120	140	2.8	2.3	2.0	1.6
LHP252012P-4R7M	4.7	20	153	180	2.0	1.8	1.5	1.2
LHP252012P-100M	10.0	20	385	462	0.9	0.8	0.7	0.5

If you require another part number please contact with us.

Note 1: Referenced ambient temperature 25°C.

Note 2: Test Condition :1MHz ,1.0 Vrms.

Note 3: Isat (Typ) : DC current (A) that will cause L0 to drop approximately 30%

Isat (Max) : DC current (A) that will cause L0 to drop 30% Max


Irms (Typ) : DC current (A) that will cause an approximate ΔT of 40°C

Irms (Max) : DC current (A) that will cause an ΔT of 40°C Max

Note 4: Operating temperature range includes self-temperature rise.

Note 5: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Typical performance curves :

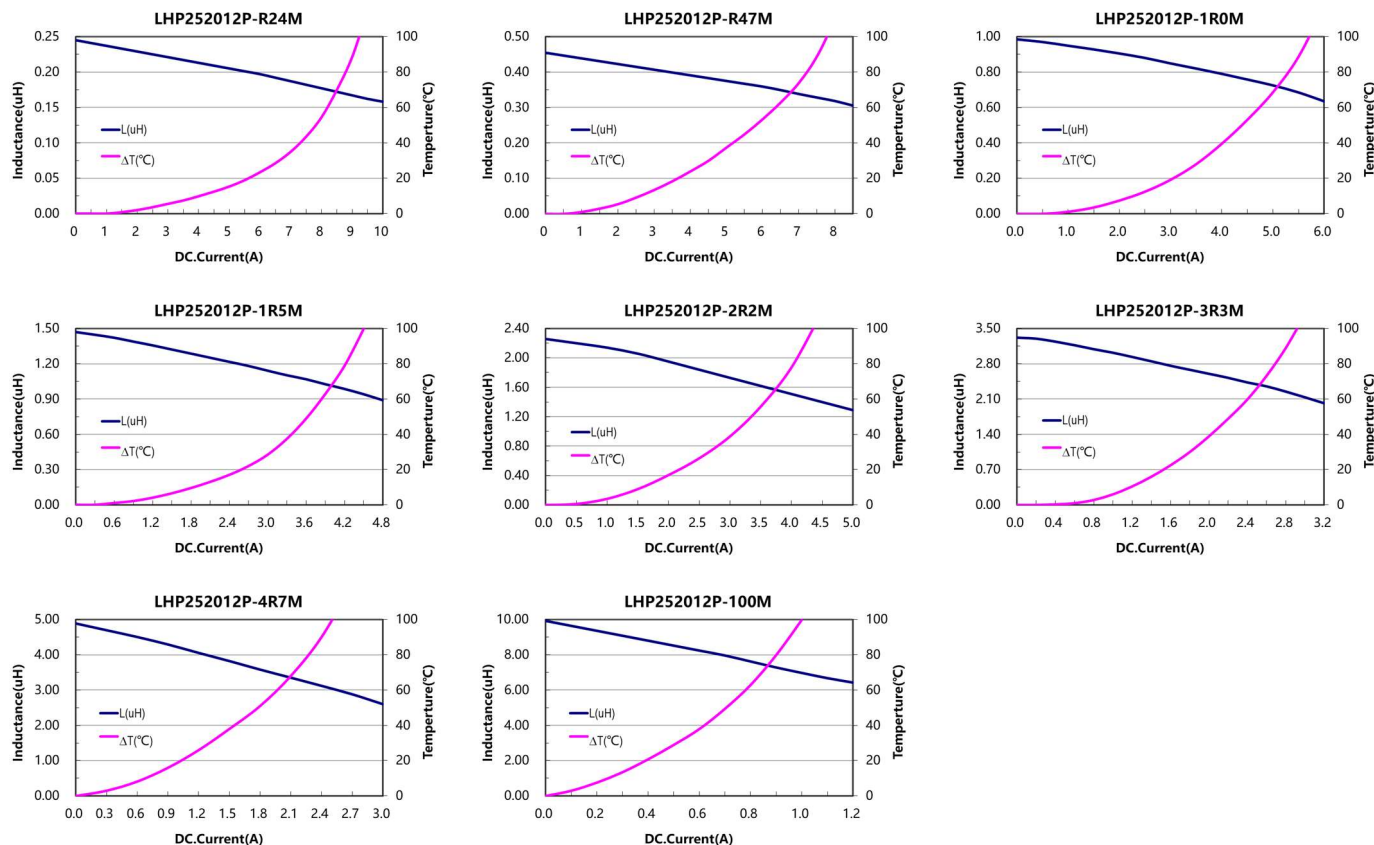

* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.




LHP3225 SERIES


HIGH POWER INDUCTOR

Applications:

- DC/DC converter for CPU in Notebook PC
- Cellular phones, LCD displays, HDDs, DVCs, PDAs etc..
- Thin type on-board power supply module for exchanger
- VRM for server

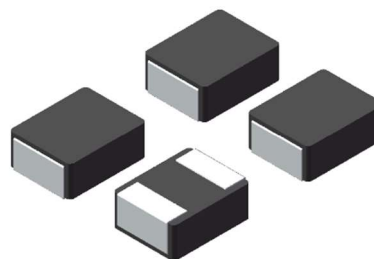

Shape and Dimensions (Dimensions are in mm)

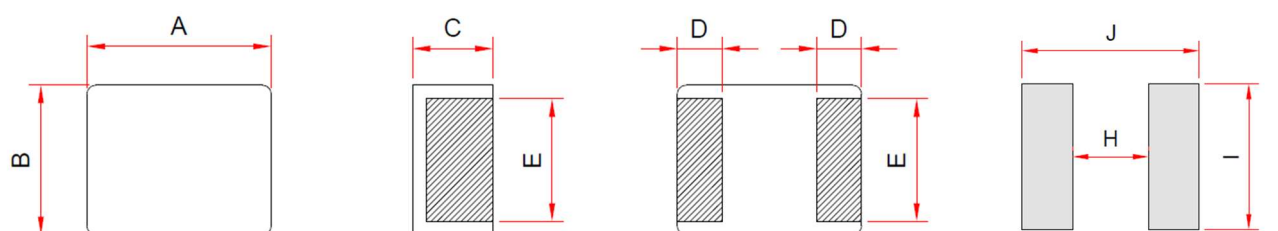

Item	A	B	C	D	E	H	I	J
LHP322512	3.2±0.2	2.5±0.2	1.0±0.2	0.6±0.3	2.3±0.2	1.7	2.8	3.5
LHP322520	3.2±0.2	2.5±0.2	1.8±0.2	0.6±0.3	2.3±0.2	1.7	2.8	3.5

Features :

- High performance (I_{sat}) realized by metal dust core.
- Low profile: 1.2~2.0mm
- Low loss realized with low DCR
- Magnetically Shielded.
- RoHS compliant.

Product Identification:

LHP 322512P - 1R0 M

(1) (2) (3) (4)

(1) Product Symbol

(2) Dimensions : **322512** is size.

(3) Inductance: **1R0** for 1.0uH.

(4) Inductance tolerance: **M**: ± 20%

Characteristics:

- Saturation Current (I_{sat}) : The current will cause L_0 to drop approximately 30% typical
- Temperature Rise Current (I_{rms}) : The current will cause the coil temperature rise approximately $\Delta T=40^\circ C$
- Operating Temperature : $-55^\circ C$ to $125^\circ C$

Test equipment :

- L: Agilent E4980 Precision LCR Meter
(Upgraded version of Agilent HP4284A)
with HP42841A Current Source
- DCR: Chroma16502 Milli-ohm meter.

● LHP322512 Series

Part No.	Inductance L(μH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
LHP322512-R47M	0.47	20	17	22	9.0	8.0	5.8	5.2
LHP322512-1R0M	1.0	20	34	42	6.3	5.8	4.2	3.8
LHP322512-1R5M	1.5	20	41	49	4.8	4.2	3.7	3.1
LHP322512-2R2M	2.2	20	64	77	4.0	3.6	2.9	2.6
LHP322512-3R3M	3.3	20	98	118	3.0	2.6	2.2	2.0
LHP322512-4R7M	4.7	20	140	157	2.8	2.4	1.9	1.6
LHP322512-6R8M	6.8	20	220	276	2.2	1.9	1.5	1.2
LHP322512-100M	10.0	20	342	410	1.8	1.5	1.1	0.8

If you require another part number please contact with us.

Note 1: Referenced ambient temperature 25°C.

Note 2: Test Condition :1MHz ,1.0 Vrms.

Note 3: Isat (Typ) : DC current (A) that will cause L0 to drop approximately 30%

Isat (Max) : DC current (A) that will cause L0 to drop 30% Max









Irms (Typ) : DC current (A) that will cause an approximate ΔT of 40°C

Irms (Max) : DC current (A) that will cause an ΔT of 40°C Max

Note 4: Operating temperature range includes self-temperature rise.

Note 5: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Typical performance curves :

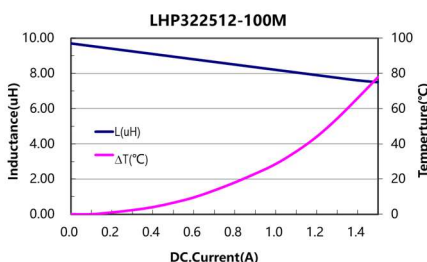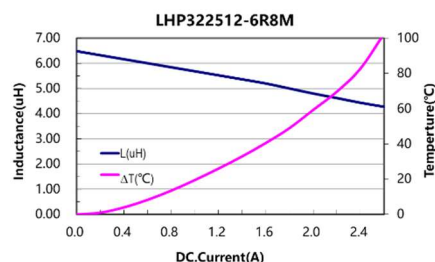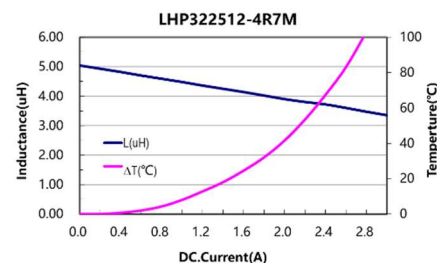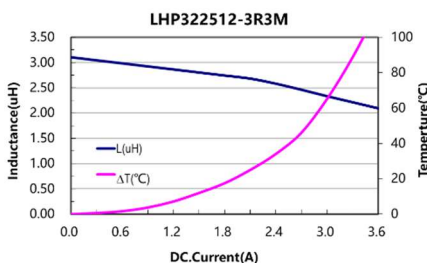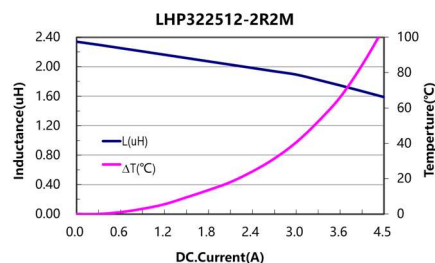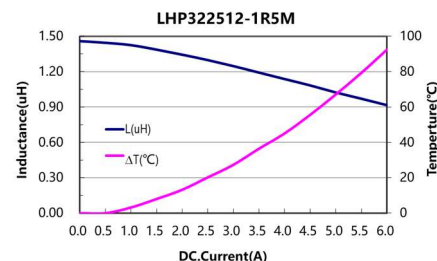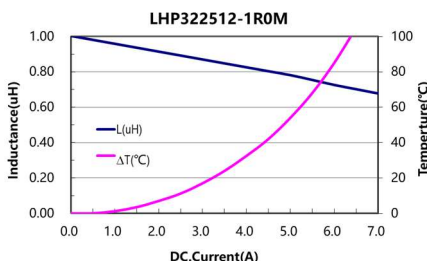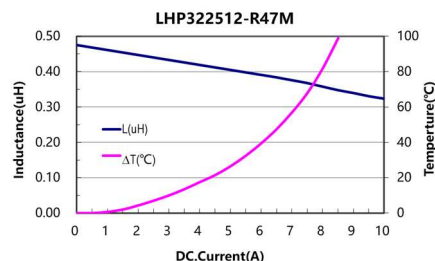

● LHP322520 Series

Part No.	Inductance L(uH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
LHP322520-1R0M	1.0	20	20	24	7.6	6.5	4.5	4.0
LHP322520-2R2M	2.2	20	33	40	4.6	4.0	3.0	2.6
LHP322520-3R3M	3.3	20	48	58	4.2	3.6	2.4	2.1
LHP322520-4R7M	4.7	20	68	82	3.4	2.8	2.1	1.9

If you require another part number please contact with us.

Note 1: Referenced ambient temperature 25°C.

Note 2: Test Condition :1MHz ,1.0 Vrms.

Note 3: Isat (Typ) : DC current (A) that will cause L0 to drop approximately 30%

Isat (Max) : DC current (A) that will cause L0 to drop 30% Max


Irms (Typ) : DC current (A) that will cause an approximate ΔT of 40°C

Irms (Max) : DC current (A) that will cause an ΔT of 40°C Max

Note 4: Operating temperature range includes self-temperature rise.

Note 5: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Typical performance curves :

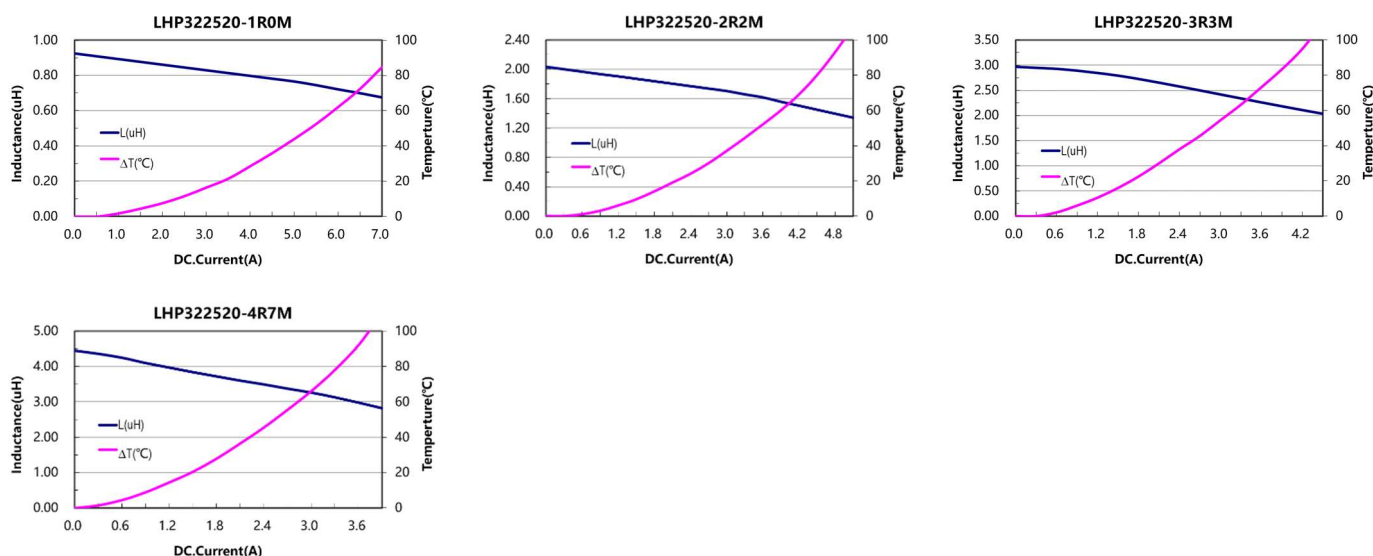

* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.